



1/2" Guidance Strip

G3001


High brightness, glow-in-the-dark guidance strip is designed for installation onto step edges (in conjunction with non-slip tread), for floor demarcation lines and around exit door frames.

The **ecoglo®** G3001 guidance strip meets the New York City Local Law 26 RS 6-1 requirements for photoluminescent markings (MEA Acceptance Report # 234-05-M "far exceeds the minimum requirement"). To comply with RS 6-1 the G3001 be used in conjunction with E2071 (glow strip with integrated non-slip) installed across full width of step.

Working just as well in the light as it does in the dark, the G3001 guidance strip is four times brighter than RS 6-1 requires - taking 8 hours to reach the minimum of 5mcd/m².



BENEFITS	TECHNICAL
Far exceeds New York City RS 6-1 Brightness Rating requirements. ecoglo® G5001 BR 106/29/20	Passes RS 6-1 Illuminance Test ISO 17398 (NYC minimum BR 30/8/5)
Highly durable and built for permanent installation inside or outside.	Meets requirements of RS 6-1 UV test. (Has already passed other relevant Weatherometer (2000 hour ASTM G155) and Salt Spray (ASTM B117) tests.)
Easy, permanent installation	Uses recommended polyurethane adhesive. Contact your distributor for installation instructions.
Easy clean - no other maintenance required.	Passes RS 6-1 cleaning test - ASTM D 4828 – RESULT 10 (no residual soiling or staining – highest possible score, minimum requirement = 5).
Does not burn	Passes RS 6-1 flame spread test – ASTM D635
Is non-toxic	Passes RS 6-1 toxicity test – Bombardier SMP800-C
Is not radioactive	Passes RS 6-1 radioactivity tests ASTM D3648

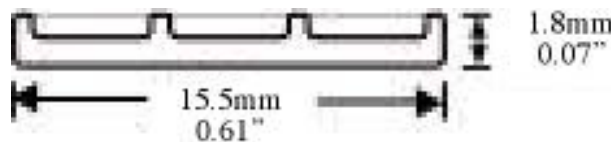

The above specifications do not apply if the products have been used in detrimental environmental or other conditions; in a manner likely to cause excessive wear and tear; or have not been charged.